





SERIES

Intell-Lab[™] Toploading Balance



- Bright Backlit LCD Display
- Capacity: 3,000 g and 5,000 g. Readability: 0.1g
- Reads in g, oz, ct, lb, GN, counting, %
- Filtering Levels
- Rechargeable Battery
- CalQuick™ Single Button Calibration
- Below Balance Weighing

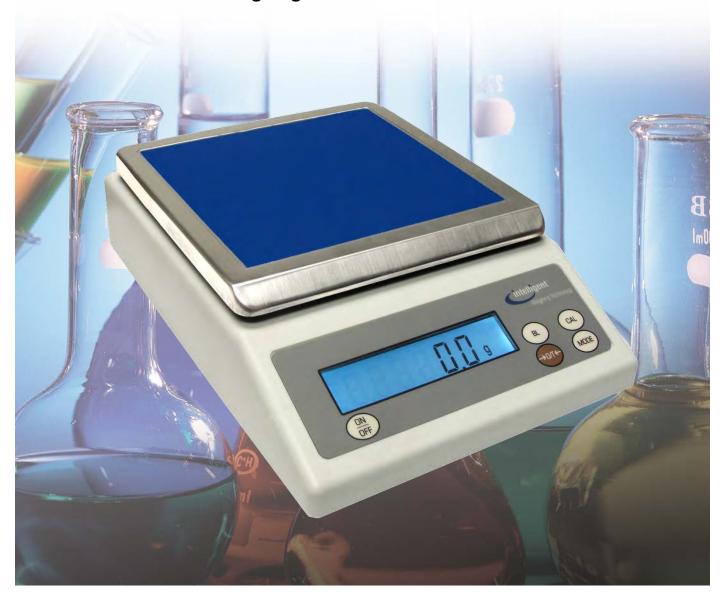





Model	PD-3000	PD-5000
Capacity	3000 g / 105 oz / 15,000 ct / 6.5 lb / 46,000 GN	5000 g / 176 oz / 24,990 ct / 11 lb / 76,600 GN
Readability	0.1 g / 0.001 oz / 0.5 ct / 0.001 lb / 0.1 GN	0.1 g / 0.001 oz / 0.5 ct / 0.001 lb / 0.1 GN
Recommended Minimum Load	1 g	
Repeatability (Std. Dev.)	± 0.1 g	
Linearity	± 0.1 g	
Stabilization Time	≈ 2 seconds	
Weighing Units	g, oz, ct, lb, GN	
Functions	%, counting, below balance weighing	
Tare Range	To capacity by subtraction	
Power Source	120 V AC/DC adapter with rechargeable 6 Volt battery	
Construction	Steel base with ABS housing	
Display	LCD display 5/8 inch / 15 mm high with configurable backlight	
Pan Size	6.5 x 6.5 inch / 165 x 165 mm stainless steel	
Overall Dimensions (W x D x H)	7 x 9.4 x 3.6 inches / 178 x 240 x 70 mm	
Operating Environment	41 °F to 95 °F / 5 °C to 35 °C Temperature fluctuation ≤ 5 °C / hour Humidity 50% to 85% RH	
Net Weight	4 lb / 1.8 kg	
Shipping Weight	6 lb / 2.7 kg	
Options	In use dust cover	

Features	Benefits	
Adjustable filter levels	Allows you to speed up or slow down weighing to account for environmental conditions	
Adjustable zero tracking	Allows for evaporation applications	
Counting program	Allows for piece counting applications	
Percentage program	Allows for formulation weighing	
Configurable backlight	Saves battery power	
CalQuick™ single button	Calibration is simple, ensuring that the balance will be calibrated often during use	
calibration		
Large stainless steel pan	Allows for easy weighing of large objects	
Bright, backlit LCD display	Easy to read in all lighting conditions including bright sunlight	
Below Balance Weighing	Allows for weighing of bulky items and allows density calulations	
Multiple weighing units	Allows flexibility of weighing	
Battery operation	Portability – can be used in various locations without access to 120 Volt power	

